



CONTINUOUS FLOWMETER (CFM)

The **Continuous Flowmeter** mechanical section (CFM) combines with GOWell's Pressure-Temperature-Flowmeter section (PTF43) to provide a fluid flow measurement in tubing.

FEATURES


- Very low friction ceramic bearings
- Easily connects and disconnects from PTF
- Easy to service
- Sour Service / NACE MR075 compliant

APPLICATIONS

- Provides a fluid flow measurement in tubing
- Ideal for Leak detection
- Flow Profile

SPECIFICATIONS

	CFM43C P/N 100518920	CFM54C P/N 100512110
GENERAL SPECS		
Maximum Operating Pressure	14,500 PSI (100 MPa)	
Maximum Operating Temperature	347°F (175°C)	
Instrument Diameter	① 1-11/16 in (43 mm)	② 2-1/8 in (54 mm)
Connections	Top: Spring Lock	
Length	5.9 in. (0.15 m)	
Threshold	5ft/min (approx)	
Materials	Ceramic Bearings, PEEK or Alum Impeller	

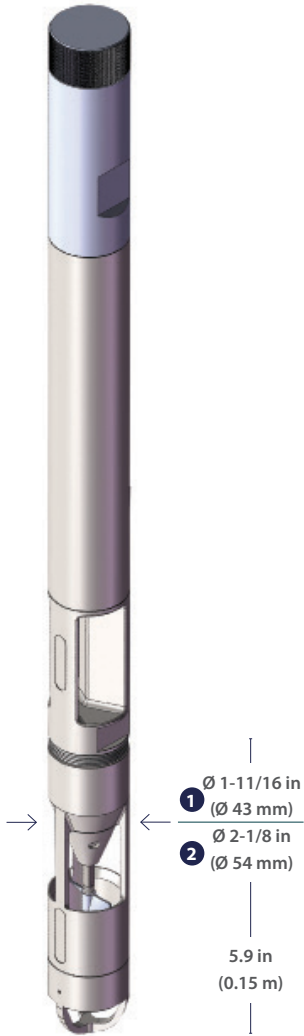

CFM

Image includes PTF