



ROLLER CENTRALIZERS

GOWell provides a range of roller centralizers (CTL) with strong centralizing force to support tool strings in highly deviated or horizontal wells. Our centralizers cover a wide range of pipe sizes from 2-7/8" tubing up to 20" casing. Models are available for sour-service environments using all NACE MR075 materials. We offer the centralizers with GO mono-pin or 13pin Pegasus and can customize with any type of connections requested by clients.



CTL43C-K

CTL70J-A

CTL90D-B

APPLICATIONS & FEATURES

- Low friction rollers
- Arm force suitable for high angle and horizontal wells
- Available in standard or sour service options
- GO monopin and Pegasus 13pin options
- Custom connections available upon request





ROLLER CENTRALIZERS

SPECIFICATIONS

	CTL43J-A	CTL43C-K	CTL43C-G	CTL70J-A	CTL70C-G	CTL70C-K	CTL90D-B	CTL90D-A
GENERAL SPECS	P/N 100516817	P/N 100516654	P/N 100516651	P/N 30000794	P/N 300000652	P/N 300001840	P/N 300001345	P/N 300001314
Max Temperature	175°C							
Max Pressure	15kpsi (103Mpa)						20kpsi (140Mpa)	
Outer Diameter	1-11/16 in. (43mm)			2-3/4 in. (70mm)			3-1/2 in. (90mm)	
Shipping Length	40.3 in. (1025mm)	40.4 in. (1027mm)	33.5 in. (851.2mm)	42 in. (1063mm)			58 in. (1490mm)	
Make-up Length	37 in. (942mm)	37.1 in. (944mm)	30 in. (761.2mm)	38.5 in. (980mm)			55 in. (1400mm)	
Operating Casing sizes	2-3/8 in. to 9-5/8 in. (60mm~244mm)			4 in. to 13-3/8 in. (101mm~340mm)			5-1/2 in. to 20 in. (140mm~508mm)	
Weight	15.4lbs (7kg)	15.4lbs (6.5kg)	11lbs (5kg)	33lbs (15kg)			44lbs (20kg)	
Max Arm force	41.2lbs (18.7Kg)			60lbs (27Kg)			Standard Spring: 60lbs (27Kg) Strong Spring: 110lbs (50Kg)	
Sour Service Rated	Yes	No		Yes	No			No
Connection type	13 pin		Mono	13 pin		Mono	Mono	13 pin
Number of arms	4			6				

Centralizing Force Chart for CTL43-F/K Centralizers

Centralizing Force Chart for CTL70-G/H Centralizers

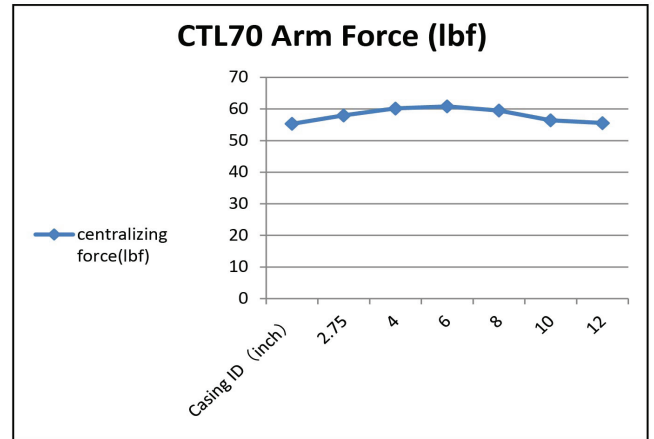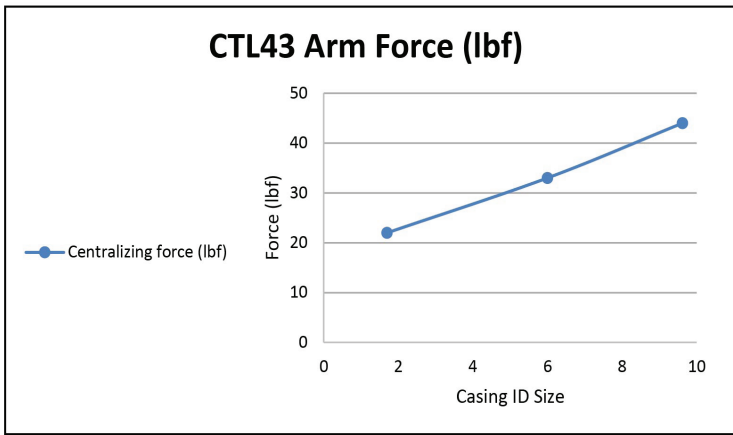

Centralizing Force Chart for CTL90 Centralizers

